

| REPORT DOCUMENTATION PAGE   |  |   | Form Approved<br>OMB No. 074-0188                       |   |
|---|--|---|---|---|
| Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503   |  |   |   |   |
| 1. AGENCY USE ONLY (Leave blank)  |  | 2. REPORT DATE<br>April 1999                        |   | 3. REPORT TYPE AND DATES COVERED<br>Proceedings, 27-29 April 1999 |
| 4. TITLE AND SUBTITLE<br>Tropodegradable Halocarbons and Main Group Element Compounds   |  |   | 5. FUNDING NUMBERS<br>N/A                               |   |
| 6. AUTHOR(S)<br>J. Douglas Mather and Robert E. Tapscott  |  |   |   |   |
| 7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)<br>Center for Global Environmental Technologies, The University of New Mexico, 901 University Boulevard SE, Albuquerque, NM 87106-4339   |  |   | 8. PERFORMING ORGANIZATION REPORT NUMBER<br>N/A         |   |
| 9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES)<br>SERDP<br>901 North Stuart St. Suite 303<br>Arlington, VA 22203   |  |   | 10. SPONSORING / MONITORING AGENCY REPORT NUMBER<br>N/A |   |
| 11. SUPPLEMENTARY NOTES<br>No copyright is asserted in the United States under Title 17, U.S. code. The U.S. Government has a royalty-free license to exercise all rights under the copyright claimed herein for Government purposes. All other rights are reserved by the copyright owner.   |  |   |   |   |
| 12a. DISTRIBUTION / AVAILABILITY STATEMENT<br>Approved for public release: distribution is unlimited.   |  |   | 12b. DISTRIBUTION CODE<br>A                             |   |
| 13. ABSTRACT (Maximum 200 Words)<br>Although it is not certain that a "drop-in" chemical substitute (as opposed to a new technology) for halons that can be used in normally occupied areas will ever be identified, there are two promising paths to such an agent. The first is to target bromocarbons with very short atmospheric lifetimes. We refer to these materials as "Tropodegradable Halocarbons." The second path is to develop non-halocarbons-chemical s that are unlike the classic halocarbon agents used in the past (halons) and those halocarbons now being commercialized (HFCs, HCFCs, and perfluorocarbons). We refer to these non-halocarbon materials as "Compounds of Main Group Elements." Herein we discuss projects sponsored by the Department of Defense Strategic Environmental Research and Development Program (SERDP) under the Next-Generation Fire Suppression Technology Program (NGP) to explore these two paths. The initiation of this work was discussed at the Halon Options Technical Working Conference 1998. |  |   |   |   |
| 14. SUBJECT TERMS<br>SERDP, SERDP Collection, tropodegradable halocarbons, bromocarbon, Main Group Element Compounds  |  |   | 15. NUMBER OF PAGES<br>12                               |   |
|   |  |   | 16. PRICE CODE<br>N/A                                   |   |
| 17. SECURITY CLASSIFICATION OF REPORT<br>unclass  |  | 18. SECURITY CLASSIFICATION OF THIS PAGE<br>unclass |   | 19. SECURITY CLASSIFICATION OF ABSTRACT<br>unclass                |
|   |  |   | 20. LIMITATION OF ABSTRACT<br>UL                        |   |

NSN 7540-01-280-5500

Standard Form 298 (Rev. 2-89)  
Prescribed by ANSI Std. Z39-18  
298-102

20000720 180

DTC QUALITY INSPECTED 4

## **TROPODEGRADABLE HALOCARBONS AND MAIN GROUP ELEMENT COMPOUNDS**

J. Douglas Mather and Robert E. Tapscott  
Center for Global Environmental Technologies  
The University of New Mexico  
901 University Boulevard SE  
Albuquerque, NM 87106-4339 USA  
Tel: +1-505-272-7259, Fax: +1-505-222-8230

Halon Options Technical Working Conference  
Albuquerque, New Mexico  
27-29 April 1999

### **INTRODUCTION**

Although it is not certain that a "drop-in" chemical substitute (as opposed to a new technology) for halons that can be used in normally occupied areas will ever be identified, there are two promising paths to such an agent. The first is to target bromocarbons with very short atmospheric lifetimes. We refer to these materials as "Tropodegradable Halocarbons." The second path is to develop non-halocarbons—chemicals that are unlike the classic halocarbon agents used in the past (halons) and those halocarbons now being commercialized (HFCs, HCFCs, and perfluorocarbons). We refer to these non-halocarbon materials as "Compounds of Main Group Elements." Herein we discuss projects sponsored by the Department of Defense Strategic Environmental Research and Development Program (SERDP) under the Next-Generation Fire Suppression Technology Program (NGP) to explore these two paths. The initiation of this work was discussed at the Halon Options Technical Working Conference 1998 [1].

### **TROPODEGRADABLE HALOCARBONS**

#### **Overview**

One approach to halon substitutes is to keep bromine in the molecule, but add features that decrease the tropospheric lifetime. The resultant compounds are said to be "tropodegradable," a term used by Dr. Jon Nimitz. A very short tropospheric lifetime can solve two problems at once. First, if the lifetime is sufficiently short, ozone depletion can be negligible, even when bromine is present. Second, a short lifetime means a low global warming potential. Research work has established the potential of tropodegradable bromocarbons as fire suppressants; however, insufficient flame extinguishment experiments have been carried out to relate performance and (for some compounds) flammability to structure. This project was established, in part, to address the need for laboratory-scale fire extinguishment information for tropodegradable compounds.

Four primary processes exist for the removal of organic molecules from the troposphere: (1) reaction with atmospheric hydroxyl free radicals; (2) photolysis; (3) physical removal; and (4) reaction with tropospheric ozone [2]. Hydroxyl free radicals, which are found in low concentrations throughout the atmosphere, are nature's way of cleaning the troposphere. These highly reactive species react with many atmospheric contaminants converting them to chemicals that are rapidly eliminated. The reaction is slow for most halocarbon contaminants; however, chemical features can speed up the reaction with hydroxyl free radicals. Photolysis is nothing more than decomposition by sunlight. Only a few types of chemicals undergo significant photolysis. Rainout is the most common physical removal process. Finally, tropospheric ozone can react with a few molecules to remove them from the atmosphere. Though chemically identical, tropospheric ozone and stratospheric ozone play entirely different roles in the atmosphere. Stratospheric ozone is welcome since it protects the earth from ultraviolet radiation. Tropospheric ozone, on the other hand, is an environmentally harmful contaminant. Removal by reaction with tropospheric ozone is actually the reaction of one contaminant with another. Various substituents can be added to molecules to enhance each of the tropospheric removal processes mentioned here.

Tropodegradable compounds that we consider the most promising are bromine-containing fluoroethers, fluoroalkyl amines, and fluoroalkenes. This paper provides some information on the ethers and the amines; however, the alkenes are emphasized.

Bromofluoroalkenes contain carbon—carbon double bonds. These materials react rapidly with both hydroxyl free radicals and tropospheric ozone. The atmospheric lifetimes are about one day, in some cases less. This compares with atmospheric lifetimes of 65 years for Halon 1301 and 20 years for Halon 1211. The commercialized halon replacements have even longer atmospheric lifetimes (except for  $\text{CF}_3\text{I}$ ).

Some of these materials look remarkable good. Some examples of extinguishment concentrations determined by cup burner with *n*-heptane fuel are shown below (Table 1). These concentrations are all lower than most of the commercialized halocarbon replacements (one exception being  $\text{CF}_3\text{I}$ ), and are comparable to the extinguishing concentration of approximately 3 vol% for Halon 1301.

TABLE 1.

| Agent                                    | n-Heptane Extinguishment<br>Concentration, vol% |
|--|---|
| $\text{CH}_2=\text{CHCBrF}_2$            | 4.50  |
| $\text{CH}_2=\text{CBrCF}_3$             | 2.55  |
| $\text{CH}_2=\text{CHCF}_2\text{CBrF}_2$ | 3.50  |

Under sponsorship of the U.S. Air Force and the Advanced Agent Working Group (AAWG), toxicity evaluations have recently been carried out on eight bromofluoroalkenes. Ten rats were exposed for 30 minutes at 5 percent by volume. The results are shown in Table 2.

TABLE 2. TOXICOLOGICAL RESULTS FOR EXPOSURE.

| CCOD ID | Formula   | Number of Rat Deaths | Lung Tissue Observations       |
|---------|---|----------------------|--------------------------------|
| 873     | $\text{CH}_2=\text{CBrCF}_3$                        | 0                    | All rat tissues normal         |
| 707     | $\text{CHBr}=\text{CHCF}_3$                         | 0                    | All rat tissues normal         |
| 872     | $\text{CH}_2=\text{CHCBrF}_2$                       | 7                    | At necropsy lungs were mottled |
| 903     | $\text{CH}_2=\text{CHCF}_2\text{CBrF}_2$            | 0                    | All rat tissues normal         |
| 1116    | $\text{CH}_2=\text{CBrCF}_2\text{CF}_3$             | 0                    | At necropsy lungs were mottled |
| 1360    | $\text{CH}_2=\text{CBr}(\text{OCF}_3)\text{CFCF}_3$ | 10                   | At necropsy lungs were mottled |
| 1358    | $\text{CH}_2=\text{CBrCF}_2\text{CF}_2\text{CF}_3$  | 1(post exposure)     | At necropsy lungs were mottled |
| 1359    | $\text{CH}_2=\text{CBrCFC}(\text{CF}_3)_2$          | 10                   | At necropsy lungs were mottled |

Compounds 873 and 903 appeared to be the most innocuous in this test. Both compounds induced a degree of anesthesia during exposure, and animals awoke following the exposure without any apparent toxicity or lung impairment. Post-exposure sleeping time was slightly greater for Compound 903 compared with 873.

Although not lethal under these conditions, Compound 707 had apparent nervous system effects as evidenced by tremors during exposure and abnormal muscular contractions postmortem. Exposure to compound 707 did not result in any lung impairment and respiration was normal during the exposure. Compound 1116 was also nonlethal, but animals did not achieve a normal clinical appearance after exposure, and some lung toxicity was associated with exposure.

### Compound Selection and Acquisition

Approximately seventy topodegradable bromofluoro-alkenes, -amines and -ethers with potential as Halon 1301 replacements have been identified. These organobromine compounds are estimated to have acceptably low Ozone Depletion Potential (ODP), and Global Warming Potential (GWP).


Twenty five alkenes representing highly fluorinated with a single vinyl bromine or bromine substitution on saturated carbons well removed from the double bond were identified. Some of the alkenes initially considered have fluorine and bromine substitution on unsaturated carbons. While compounds with this substitution pattern may exhibit higher cup-burner values and possibly increased toxicity actual testing is required to determine their potential as halon replacements.

The eight bromofluoro-alkenes listed in Table 2 and the two additional bromofluoroalkenes, 1-bromo-3,3,3-trifluoro-2-trifluoromethyl propene  $(\text{CF}_3)_2\text{C}=\text{CHBr}$  and 1-bromo-2,2,3,3,3-pentafluorobutene  $(\text{CF}_3\text{CF}_2\text{CH}=\text{CHBr})$  more recently acquired all have no substitution by

fluorine on the carbon-carbon double bond. Cup-burner flame extinguishment values for all of the alkenes are expected to be less than 5 percent and atmospheric lifetimes may well be on the order of a few days.

A list of twenty four bromofluoro-amines was developed based on estimates of flame extinguishment, physical properties, toxicity and environmental performance. From this a list of eight promising candidate compounds was identified and targeted for synthesis.

Amine synthesis is perhaps the most difficult challenge. A facile method based on the preparation of perfluoro-2-azapropene with subsequent bromination to form bromobis(trifluoromethyl)amine enables preparation of a series of compounds has been identified and is being attempted, (Reaction 1). By substituting a variety of fluoroethenes (e.g., CHF=CH<sub>2</sub>, CF<sub>2</sub>=CH<sub>2</sub>, CHF=CHF, CF<sub>2</sub>=CHF) for the ethylene in Reaction 1, a series of new tropodegradeable compounds can be obtained.



A list of twenty bromofluoro-ethers was developed based on estimates of their flame extinguishment, physical properties, toxicity and environmental performance. Work on the synthesis of bromofluoro-amines and -ethers is currently in progress.

## COMPOUNDS OF MAIN GROUP ELEMENTS

### Overview

Most studies to date on chemical substitutes for halons have focused on halocarbons. Some limited past work, however, has looked at chemicals containing silicon, phosphorus, and nitrogen, i.e., materials based on chemical elements other than carbon [3]. The present project expands that past work to ensure that no promising non-halocarbon candidate substitutes are overlooked.

The term "main group elements" denotes elements other than transition metals. This project, however, excludes the main group of families halocarbons, amines, ethers, and silicon compounds, which have been examined extensively elsewhere. We have long used one class of non-halocarbon agents for fire and explosion protection—dry powder agents such as potassium bicarbonate and monoammonium phosphate. The present project, however, is restricted to liquids or gases.

With one major exception, the results of the search have been disappointing. Few materials with potentially acceptable physical (primarily, volatility) and toxicological properties have been identified. The lowest molecular weight materials (i.e., the materials with the highest volatilities) often have hydrogen or halogen atoms directly attached to non-carbon atoms. The former (containing hydrogen) are often flammable, and the latter (containing halogens) are usually toxic (owing to hydrolysis). Both often have low stabilities. The major exception is that fluoroalkyl

phosphorus compounds, though having a relatively low volatility, continue to hold significant promise.

In the remainder of this paper, we will look at two areas of major interest in this study: volatility (evaporation) and phosphorus compounds.

## Evaporation

Compounds that are not solids at room temperature are targeted under the present project. Most of the compounds identified as having potential extinguishment capabilities are liquids with relatively high boiling points. A major criterion for such liquids is an ability to evaporate and fill a space to a required concentration within the time required for extinguishment. Thus, evaporation properties must be taken into account during compound review and selection. Areas to be considered are evaporation equilibrium and evaporation rate. Here, we look only at the first.

The question of whether a given compound can achieve the required extinguishment concentration upon discharge, given sufficient time for evaporation to occur, is easily answered since only thermodynamics are involved. The logarithm of the ratio of the vapor pressure ( $p$ ) at two different temperatures  $T_2$  and  $T_1$  can be estimated from Equation 1 (Clausius-Clapeyron equation), where  $R$  is the ideal gas constant and  $\Delta H_{\text{vap}}$  is the heat of vaporization. This equation is based on the assumption that (1)  $\Delta H_{\text{vap}}$  is temperature independent and (2) the vapor is an ideal gas. The ratio of  $\Delta H_{\text{vap}}/T_b$ , where  $T_b$  is the boiling point temperature, is equal to the molar entropy of vaporization  $\Delta S_{\text{vap}}$  at the boiling point. For closely related compounds,  $\Delta S_{\text{vap}}$  at the boiling point is nearly constant with a value of  $t_c$ , Trouton's constant (Equation 2). Thus, by selecting  $T_1$  as the boiling point ( $T_b$ ) at, for example, 1 atmosphere pressure (i.e.,  $p_1 = 760$  Torr), one can estimate the vapor pressure at some other temperature and develop an approximate vapor pressure/temperature curve, if  $t_c$  is known.

$$\log_{10}(p_2/p_1) = (\Delta H_{\text{vap}}(T_2 - T_1)/2.302585RT_2T_1) \quad [1]$$

$$\Delta H_{\text{vap}}/T_b = \Delta S_{\text{vap}} \approx t_c \quad [2]$$

The two equations can be combined to simplify the estimation. Thus, for a boiling point  $T_b$  in K at a pressure  $P_b$  (Equation 3), where Trouton's constant  $t_c$  in units of J/K-mol is a variable to be determined for a particular family of compounds, is obtained.

$$p_2 = P_b 10^{(0.05221065)t_c[1-(T_b/T_2)]} \quad [3]$$

For example, if  $t_c$  is taken to be equal to 88 J/K-mol, which holds for many compounds, one can estimate that the vapor pressure at 25 °C for a compound with a boiling point of  $T_b = 50$  °C at 760 Torr is 313 Torr. From vapor pressure values, one can calculate the maximum concentration possible. For one atmosphere total pressure, the maximum volume fractions are  $p_2/760$  for  $p_2$  in Torr. Of particular interest is the maximum allowable boiling point ( $T_b$ ) that can achieve a given concentration (C) for various ambient temperatures,  $T_2$ . Equation 4 gives the calculation for

boiling points at  $P_b = 760$  Torr, where temperatures are in K and  $t_c$  is in J/K-mol. Table 3 gives the estimated maximum boiling point that can achieve concentrations from 1 vol% to 20 vol% for a Trouton constant of 88 J/K-mol. The data are plotted in Figure 1 (some data have been omitted to simplify the figure).

$$\begin{aligned} T_b &= [1 - (\text{Log}(760C/100P_b)/0.05221065t_c)]T_2 \\ &= [1 - (\text{Log}(C/100)/0.05221065t_c)]T_2 \end{aligned} \quad [4]$$

TABLE 3. ESTIMATED MAXIMUM BOILING POINT THAT CAN  
ACHIEVE A GIVEN AIR CONCENTRATION.

| Conc. | Ambient Temperature, °C |     |     |     |     |     |     |     |     |     |     |     |
|-------|-------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| %     | -60                     | -50 | -40 | -30 | -20 | -10 | 0   | 10  | 20  | 30  | 40  | 50  |
| 1     | 33                      | 47  | 61  | 76  | 90  | 105 | 119 | 133 | 148 | 162 | 176 | 191 |
| 2     | 19                      | 33  | 46  | 60  | 74  | 87  | 101 | 115 | 128 | 142 | 156 | 169 |
| 3     | 11                      | 24  | 37  | 51  | 64  | 77  | 91  | 104 | 117 | 130 | 144 | 157 |
| 4     | 5                       | 18  | 31  | 44  | 57  | 70  | 83  | 96  | 109 | 122 | 135 | 148 |
| 5     | 0                       | 13  | 26  | 39  | 52  | 65  | 77  | 90  | 103 | 116 | 129 | 142 |
| 6     | -3                      | 9   | 22  | 35  | 47  | 60  | 73  | 85  | 98  | 111 | 123 | 136 |
| 7     | -6                      | 6   | 19  | 31  | 44  | 56  | 69  | 81  | 94  | 106 | 119 | 131 |
| 8     | -9                      | 3   | 16  | 28  | 40  | 53  | 65  | 78  | 90  | 102 | 115 | 127 |
| 9     | -11                     | 1   | 13  | 25  | 38  | 50  | 62  | 74  | 87  | 99  | 111 | 124 |
| 10    | -14                     | -1  | 11  | 23  | 35  | 47  | 59  | 72  | 84  | 96  | 108 | 120 |
| 11    | -16                     | -3  | 9   | 21  | 33  | 45  | 57  | 69  | 81  | 93  | 105 | 117 |
| 12    | -17                     | -5  | 7   | 19  | 31  | 43  | 55  | 67  | 79  | 91  | 103 | 115 |
| 13    | -19                     | -7  | 5   | 17  | 29  | 41  | 53  | 65  | 77  | 88  | 100 | 112 |
| 14    | -20                     | -9  | 3   | 15  | 27  | 39  | 51  | 63  | 74  | 86  | 98  | 110 |
| 15    | -22                     | -10 | 2   | 14  | 25  | 37  | 49  | 61  | 73  | 84  | 96  | 108 |
| 16    | -23                     | -11 | 0   | 12  | 24  | 36  | 47  | 59  | 71  | 83  | 94  | 106 |
| 17    | -24                     | -13 | -1  | 11  | 22  | 34  | 46  | 57  | 69  | 81  | 92  | 104 |
| 18    | -25                     | -14 | -2  | 9   | 21  | 33  | 44  | 56  | 68  | 79  | 91  | 102 |
| 19    | -27                     | -15 | -3  | 8   | 20  | 31  | 43  | 54  | 66  | 78  | 89  | 101 |
| 20    | -28                     | -16 | -5  | 7   | 19  | 30  | 42  | 53  | 65  | 76  | 88  | 99  |




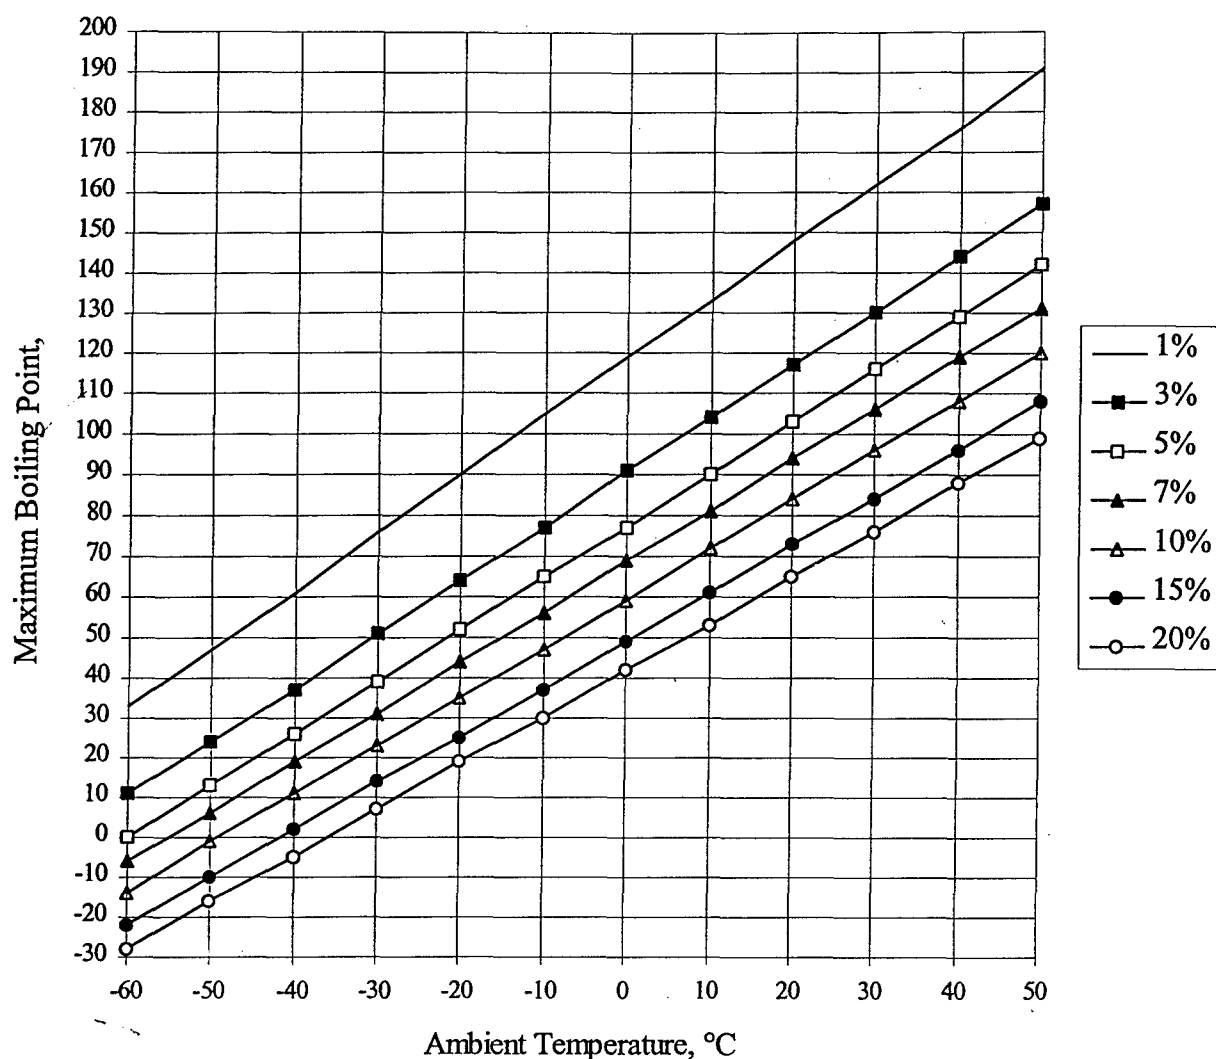


Figure 1. Estimated Maximum Boiling Points that Can Achieve Given Concentrations as a Function of Ambient Temperature (Simplified), Calculated for  $t_c = 88 \text{ J/K-mol}$ .

This analysis shows that one that a compound with a boiling point of over  $100^\circ\text{C}$  can likely achieve a concentration of 5 vol% at normal room temperature ( $25^\circ\text{C}$ ). Whether such a compound can achieve such a concentration in a reasonable amount of time is, however, a quite separate question.

## Phosphorus Compounds

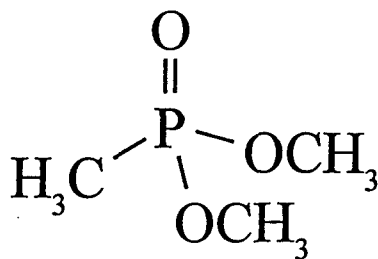


DMMP

Compounds of phosphorus have been of particular interest [4]. Phosphorus compounds appear to provide a chemical fire extinguishment mechanism, just like the bromine-containing halons, and some appear to be highly effective. Much work has been performed on dimethyl methyl phosphonate (DMMP) and related compounds by Professor Elizabeth Fisher and her co-workers at Cornell [5, 6]. Though DMMP shows very promising flame suppression characteristics, this compound and most of the related compounds studied to date have some serious drawbacks. First, the material is flammable (it is

actually possible, though not practical, to extinguish flames with a flammable material). Second, most compounds studied to date have low vapor pressures and are not very volatile.

One way to address both of these problems is to work with phosphorus compounds containing fluoroalkyl group—substituents with fluorine replacing part or all of the hydrogen atoms. The presence of fluorine decreases or eliminates flammability and increases volatility. For example, tris(2,2,2-trifluoroethyl)phosphite (TFEP) has a lower boiling point than DMMP and is non-flammable. Moreover, the material is an excellent fire suppressant. We have determined that the concentration required to extinguish an *n*-heptane flame is  $1.78 \pm 0.04$  vol%. This can be compared with the concentration of approximately 3.2 vol% for Halon 1301.

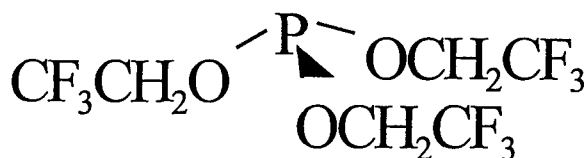

TFEP

Heat extraction experiments also indicate an excellent extinguishing ability for TFEP (Figure 2). In these experiments, the heat extracted by a burner top from a premixed methane flame is measured as a function of added TFEP. As the flame approaches extinguishment, less and less heat is extracted. A distinct (and, as yet, unexplained) break occurs in the curve. To the left of the break the fitted straight line has a slope of  $-107$  cal/cc  $\text{CH}_4$ . Extrapolation to a zero heat output gives a predicted extinguishment concentration of 0.008 mole fraction TFEP (0.8 vol%). To the right of the break the fitted straight line has a slope of  $-50$  cal/cc  $\text{CH}_4$  and gives an extrapolated extinguishment mole fraction of 0.015 (1.5 vol%).

Figure 3 plots the heat abstraction for a fixed concentration of TFEP in a premixed methane flame as a function of the fuel/air ratio  $\Phi$ . For a stoichiometric flame,  $\Phi$  is 1.00. Higher values of  $\Phi$  indicate a fuel-rich flame; lower values, a fuel lean flame. The plot is symmetric, which indicates that the TFEP is not acting as a fuel in the flame.

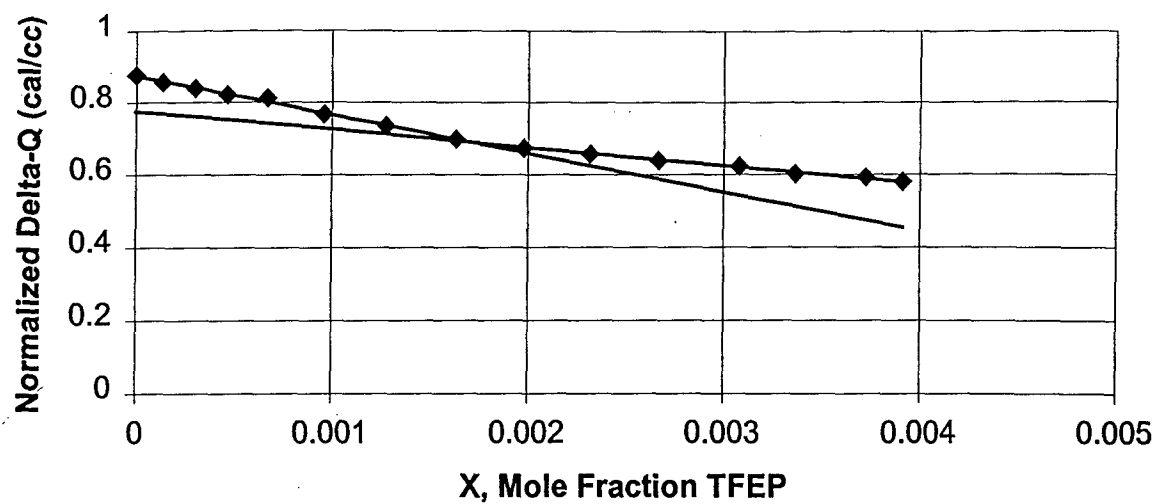


Figure 2. Heat Absorption Curves for Methane Flame with TFEP.


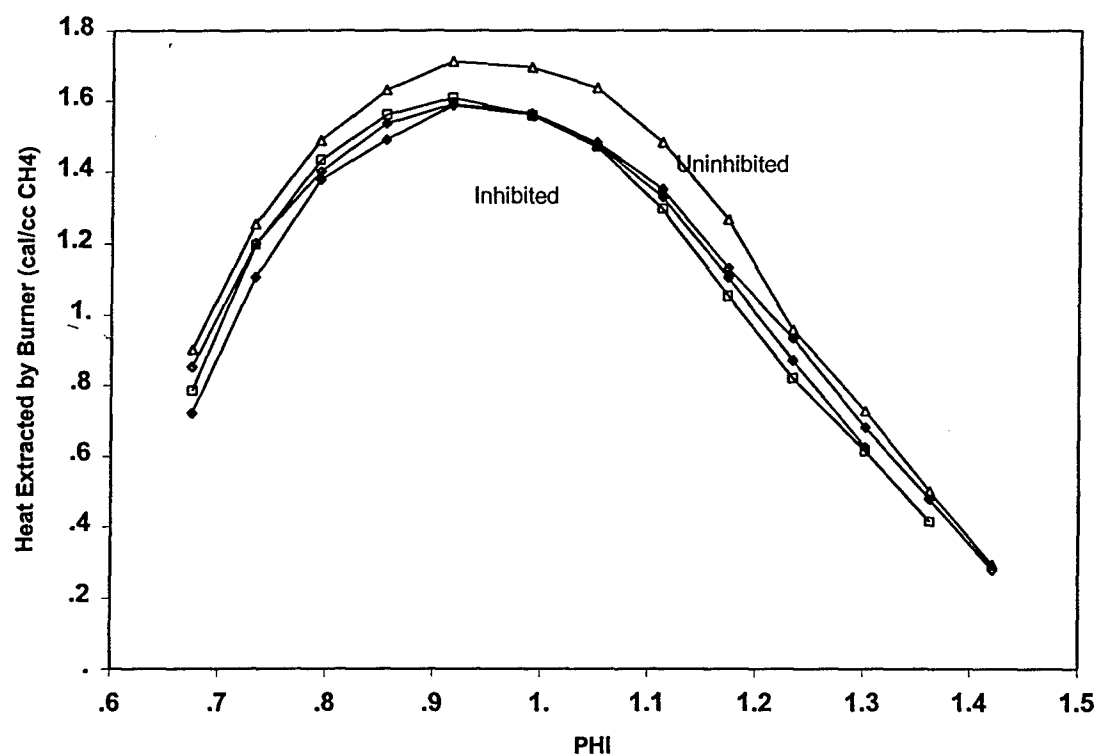


Figure 3. Heat Extraction From Methane Flame with TFEP versus Fuel/Air Ratio ( $\Phi$ )

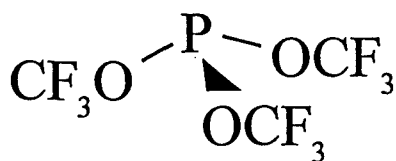


TFMP

There is one major problem with TFEP. Though the volatility is improved, it is still not nearly what one would like. For that reason, the synthesis of fluoroalkyl phosphorus compounds with lower molecular weights should be undertaken. For example, tris(trifluoromethyl)phosphite (TFMP), which should have a relatively high volatility, is particularly promising. A major problem exists—TFMP has never been made! Though

this appears to be a severe drawback, there is no reason to believe that it cannot be made. The very closely related compound, tris(trifluoromethyl)phosphate has, in fact, been prepared, though, as yet, it is untested, and has a boiling point of 52 °C [7]. This boiling point is a little high; however,

there is good reason to believe that it could be acceptable. The unknown compound TFMP is expected to have a lower boiling point.

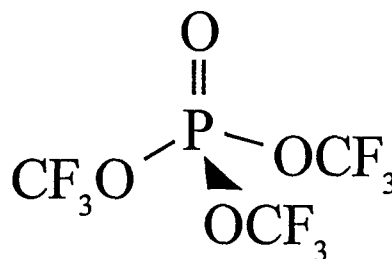

Tris(trifluoromethyl)phosphate

The work to date indicates that, of all of the non-halocarbon and non-metal compounds, phosphorus-containing derivatives hold the most promise as halon substitutes. We still know little about toxicity, and this is always of major concern. Also, the volatility and discharge properties may not be ideal. We have been working on ways to increase discharge rates, and it may be possible to use these materials as aerosols or as blends with appropriate carriers.

## ACKNOWLEDGMENTS

This work was sponsored, in part, by the Department of Defense Next-Generation Fire Suppression Technology Program, funded by the DoD Strategic Environmental Research and Development Program (SERDP) under Contracts HQ0038-7350-0009 and HQ0038-7350-0007. The tropodegradable bromocarbon toxicity studies were conducted under Contract SEAMAS SSG Task 1.4.6, F08637-98-C-6001 for the U. S. Air Force and Applied Research Associates with additional support from the Advanced Agent Working Group through Contract 349.

## REFERENCES

1. Mather, J. D., and Tapscott, R. E., "Next-Generation Fire Suppression Technology Program: NMERI/CGET Projects Overview," *Proceedings, Halon Options Technical Working Conference*, Albuquerque, New Mexico, 12-14 May 1998.
2. Tapscott, R. E., Heinonen, E. W., and Mather, J. D., *Identification and Proof Testing of New Total Flooding Agents: Toxicity and Global Environmental Assessment*, Interim Report, NMERI 97/29/33010, U. S. Department of Defense, Strategic Environmental Research and Development Program and Defense Advance Research Projects Agency, Arlington, Virginia, February 1998.

3. Tapscott, R. E., Moore, T. A., Kaizerman, J. A., Kibert, C. J., and Tetla, R. A., "Advanced Agent Halon Substitutes," *Proceedings, International CFC and Halon Alternatives Conference*, Washington, DC, pp. 644-648, 23-25 October 1995.
4. Kaizerman, J. A., and Tapscott, R. E., *Advanced Streaming Agent Development, Volume III: Phosphorus Compounds*, NMERI 96/5/32540, Vol. 3 of 5, Wright Laboratory (WL/FIVCF), Tyndall Air Force Base, Florida and Applied Research Associates, Inc., Tyndall Air Force Base, Florida, May 1996.
5. MacDonald, M. A., Jayaweera, T. M., Fisher, E. M., and Gouldin, F. C., "Inhibition of Non-Premixed Flames by Dimethyl Methylphosphonate," Technical Meeting, Central States Section of The Combustion Institute, Point Clear, Alabama, 27-29 April 1997.
6. MacDonald, M. A., Jayaweera, T. M., Fisher, E. M., and Gouldin, F. C., "Inhibition of Non-Premixed Flames by Phosphorus-Containing Compounds," *Combustion and Flame*, Vol. 116, pp. 166-176, 1999.
7. Mahler, W., "Oxidation of Tris(trifluoromethyl)phosphine," *Inorganic Chemistry*, Vol. 18, No. 2, pp. 352-354, 1979.